

BEARING LUBRICATION AND FILTRATION SYSTEMS

The Bearing Lubrication & Filtration Systems that OilQuip supplies were developed to reduce overall operational maintenance cost associated with contaminated bearings, gear boxes and other rotational equipment. The end-user is able to purify a system's lube oil while on-line. This process removes harmful contaminants before they can accumulate and cause problems. Our systems can be designed to filter, lubricate, remove heat, monitor flow, monitor temperature and monitor pressure at the same time to ensure maximum system performance and reliability. They can be equipped to remove particulate, water, and acid in one complete system.

FEATURES

High efficiency particulate removal elements: Synthetic - inert & inorganic filter media. Removes particles as small as ½ micron after one pass.

Water removal capability: Remove water from the lubrication oil while filtering.

Optional heat exchanger: Remove excess heat and reduce equipment and oil temperature. Maximise oil life and control oxidation.

Custom design capability: We custom design our systems to meet the demands of each unique application. Monitor flow, temperature and pressure in one package.


RECOMMENDED FOR SYSTEMS WITH:

- High bearing failure frequency
- High mechanical wear due to contaminated lube oil
- Fluids with high particle counts
- Oil with moisture content

OUR BEARING LUBE FILTRATION SYSTEMS CAN HELP:

- MAXIMIZE BEARING LIFE
- EXTEND OIL LIFE
- REDUCE MECHANICAL COMPONENT WEAR
- REDUCE DOWNTIME
- ACHIEVE THE HIGHEST DEGREE OF PREVENTATIVE MAINTENANCE



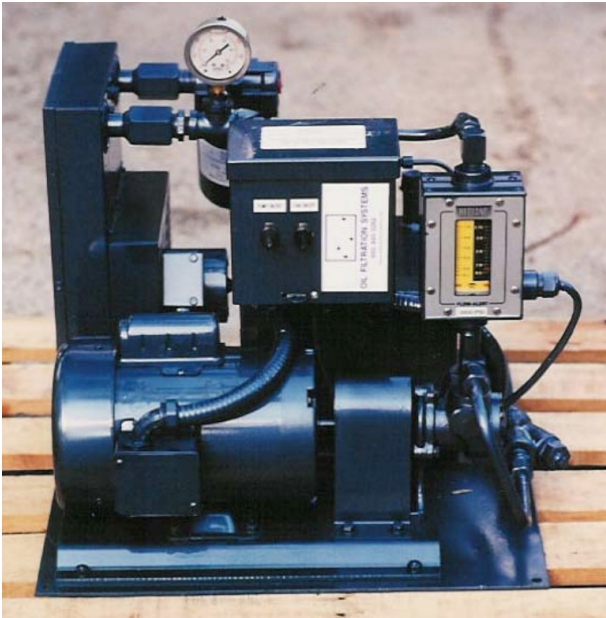

ELECTRICAL SPECIFICATIONS

Voltage options: 120 / 220 VAC, 1 Ph., 60Hz 220/380/480/575 VAC, 3 Ph., 60 Hz & 50 Hz.

Motors: 1/4 - 100 hp, 1750 RPM, TEFC or explosion proof.

Control: Remote or manual start options.

Enclosures: Nema 4X standard. Optional NEMA 7 explosion proof.

MECHANICAL SPECIFICATIONS

Flow rate options from: .04 to 3800 LPM

Flow meters: Monitor system flow and provide low & high level flow indication.

Heat exchanger: Air cooled or liquid cooled options. Remove heat from the system and lower the lubricating fluid temperature.

Filter Housings: 1, 2, or 3 filter vessels for particulate, water & acid removal. Plugged element indication: Differential pressure gauges provide 30-40 PSID indication when the elements need to be changed.

Pump: Heavy-duty self duty self-priming positive priming positive displacement gear pump or centrifugal pump options.

Connections: NPT standard. Flange, SAE, or JIC options available.

Gauges: System temperature and pressure gauges are standard.

Oil Sample Valve: Oil sample valve for quick & convenient oil analysis.

Custom options are always available.

CONTACT US FOR DETAILS ON OUR FLEET — AVAILABLE TO RENT OR PURCHASE

OilQuip

www.oilquip.com.au

+61 456 396 241

Australian Depot:
3/34 Enterprise Street, Cleveland
Queensland 4163